


Flame-proof Ex d electrical enclosure, well-sealed threaded design.




Max 4 entries, enables loop-in and loop-out connections.

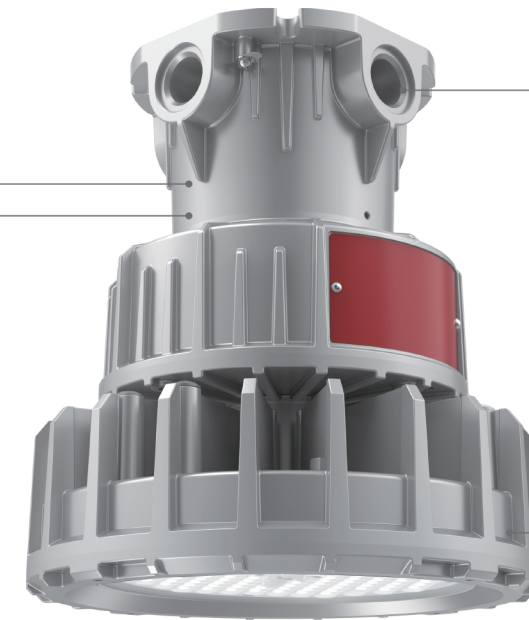

Copper-free aluminum alloy body, great corrosion resistance.

5 different brackets, suitable for indoor and outdoor.

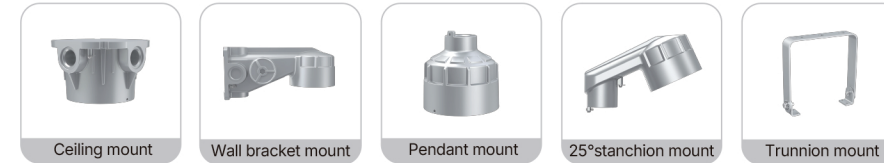

LHA03 Victory



Victory is designed to provide optimum illumination in areas where flammable gases and vapors are constantly present. Its seamless enclosure effectively keeps the explosion inside, eliminating the potential danger to the personnel and facilities.



Certification and compliance

• NEC & CEC

Class I, Division 1, Groups B, C, D
Class I, Division 2, Groups B, C, D
Class II, Division 1, Groups E, F, G
Class II, Division 2, Groups F, G
Class III


Class I, Zone 1, Group IIB plus hydrogen
Class I, Zone 2, Group IIB plus hydrogen
Zone 20 and Zone 21
Zone 22

• IECEx:

Ex db IIC T6/T5 Gb
Ex tb IIIC T80°C/T95°C Db IP66

• ATEX:

II 2G Ex db IIC T6/T5 Gb
II 2D Ex tb IIIC T80°C/T95°C Db IP66



Code	Watt	Lumen (±10%)	Comparable HID Luminaire	N.W/pc(kgs & Lbs)	Size
LHA03-030	30W	4,200lm	70W to 100W MH	8.3 & 18.26	Ø248x274mm (9.8"×10.8")
LHA03-040	40W	5,600lm	100W to 150W MH	8.3 & 18.26	Ø248x274mm (9.8"×10.8")
LHA03-050	50W	7,000lm	150W to 175W MH	8.3 & 18.26	Ø248x274mm (9.8"×10.8")
LHA03-060	60W	8,400lm	175W to 250W MH	8.3 & 18.26	Ø248x274mm (9.8"×10.8")
LHA03-070	70W	9,800lm	250W to 320W MH	8.3 & 18.26	Ø248x274mm (9.8"×10.8")

Disclaimer: technical data is subject to change without prior notice.