



HB57

The most energy-saving LED highbay light with super high efficiency 175lm/w



175 lm/W



IP65



IK08



0-10V



Zhaga Base



PIR Sensor



Microwave
Sensor



Bluetooth



CASAMBI

Intelligent Solution, More Energy-saving

Twist central sensor making the high bay solution more energy-saving and with higher performance.




Zhaga Base
Zhaga base is optional to match different smart controllers.

Optimized Packaging, Save Freight Cost


The optimized package facilitates transportation and storage.

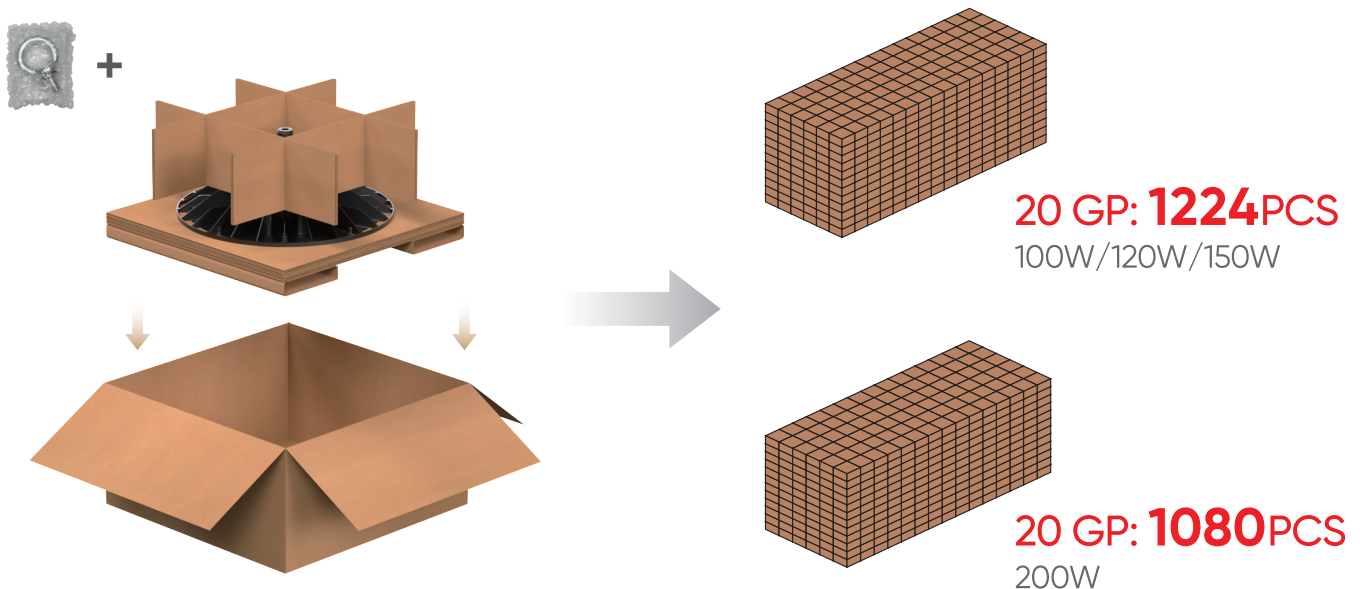


HB57 Product Range

Model	LO-HB57-100	LO-HB57-120	LO-HB57-150	LO-HB57-200
Power Consumption ($\pm 10\%$)	100W	120W	150W	200W
Input Voltage	220-240Vac, 50 / 60 Hz			
Efficacy (4000K Ra80)	175lm/W			
Luminous Flux (175lm/W)	17500lm	21000lm	26250lm	35000lm
Beam Angle	60°/90°/120°			
Control	Microwave Motion Sensor, PIR sensor, Dimmable, 0-10V, Zhaga			
CCT & CRI	5000K (3000K, 4000K optional)			
Protection	IP65, IK08			
Operating Temp	-30°C to + 50°C			
Warranty	5 years			


Photometric Diagrams

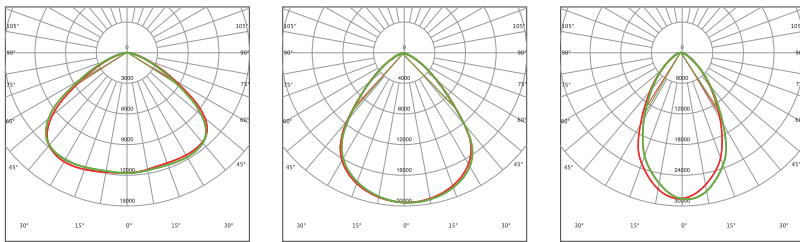

Mounting Options

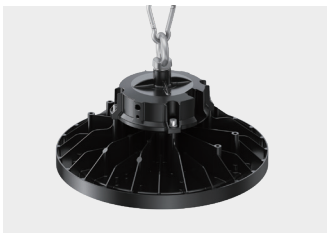

Loop mounting

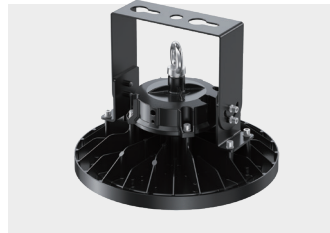

Ceiling mounting